
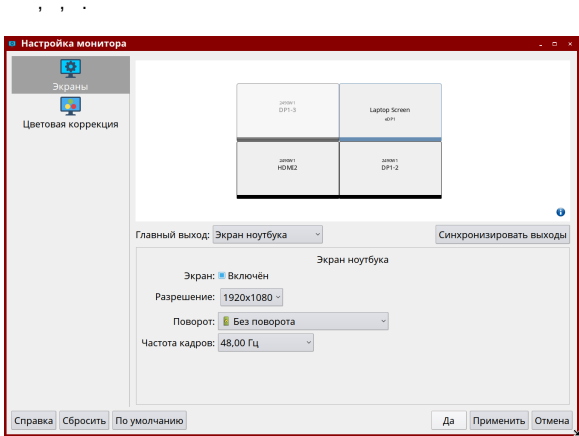


fly-admin-screen

fly-admin-screen Astra Linux :

- (" - " - " - ");
- ;
-

fly-admin-screen



/etc/X11/xorg.conf

/etc/X11/xorg.conf , (,). .

Section "ServerLayout"

Identifier "X.org Configured" Screen 0 "Screen0" 0 0

InputDevice "Mouse0" "CorePointer"

InputDevice "Keyboard0" "CoreKeyboard"

EndSection

Section "Files"

ModulePath "/usr/lib/xorg/modules"

FontPath "/usr/share/fonts/X11/misc"

FontPath "/usr/share/fonts/X11/100dpi/:unscaled"

FontPath "/usr/share/fonts/X11/75dpi/:unscaled"

FontPath "/usr/share/fonts/X11/Type1"

FontPath "/usr/share/fonts/X11/100dpi"

FontPath "/usr/share/fonts/X11/75dpi"

FontPath "/usr/share/fonts/msttcorefonts"

FontPath "built-ins"

EndSection

Section "Module"

Load "record"

```
Load "dri"
Load "dri2"
Load "extmod"
Load "dbe"
Load "glx"
```

EndSection

Section "InputDevice"

```
Identifier "Keyboard0"
Driver "kbd"
Option "XkbLayout" "us,ru"
Option "XkbOptions" "grp:ctrl_shift_toggle"
```

EndSection

Section "InputDevice"

```
Identifier "Mouse0"
Driver "mouse"
Option "Protocol" "auto"
Option "Device" "/dev/input/mice"
# Option "ZAxisMapping" "4 5 6 7"
```

EndSection

Section "Monitor"

```
Identifier "MonitorLVDS"
# VendorName "Monitor Vendor"
ModelName "Monitor Model"
Option "DPMS" "False"
Option "Position" "0 0"
```

EndSection

Section "Monitor"

```
Identifier "MonitorVGA"
# VendorName "Monitor Vendor"
ModelName "Monitor Model"
Option "DPMS" "False"
Option "RightOF" "MonitorLVDS"
Option "Position" "1280 0"
#Option "Position" "1366 0" # Position
```

EndSection

Section "Device"

```
### Available Driver options are:-
### Values: <i>: integer, <f>: float, <bool>: "True"/"False",
### <string>: "String", <freq>: "<f> Hz/kHz/MHz"
### [arg]: arg optional
```

```

#Option "ColorKey"# <i>
#Option "Dac6Bit" # [<bool>]
Option "DRI" "True"# [<bool>]
#Option "NoDDC" # [<bool>]
#Option "ShowCache" # [<bool>]
#Option "PageFlip" # [<bool>]
Option "Tiling" "True"
Option "XvPreferOverlay" "True"
Option "FallbackDebug" "False"
Option "XvMC" "True"
Identifier "Card0"
Driver "intel"
VendorName "Intel Corporation"
BoardName "Core Processor Integrated Graphics Controller"
BusID "PCI:0:2:0"
Option "monitor-VGA1" "MonitorLVDS"

Option "monitor-HDMI1" "MonitorVGA" # /var/log/Xorg.log.0
monitor-HDMI1 monitor-VGA1 # monitor-DP1 monitor-DP2 monitor-HDMI2

```

EndSection

Section "Screen"

```

Identifier "Screen0"
Device "Card0"
Monitor "MonitorLVDS"
SubSection "Display"
    Viewport 0 0
    Depth 24
    # Modes "1366x768" # 1 Modes "1280x1024"
EndSubSection

```

EndSection

Section "Screen"

```

Identifier "Screen0"
Device "Card0"
Monitor "MonitorVGA"
SubSection "Display"
    Viewport 0 0 Depth 24
    #Modes "1280x1024" # 2 Modes "1680x1050"
EndSubSection

```

EndSection

[acer_2monitor_config\(1\).tgz](#)

1360x768.

cvt:

```
cvt 1360 768 60
```

:



Modeline "1360x768_60.00" 84.75 1360 1432 1568 1776 768 771 781 798 -hsync +vsync

Modeline :

```
#
```

```
xrandr --newmode "1360x768_60.00" 84.75 1360 1432  
1568 1776 768 771 781 798 -hsync +vsync
```

```
#
```

```
xrandr --addmode VGA-0 1360x768_60.00
```

```
#
```

```
xrandr --output VGA-0 --mode 1360x768_60.00
```

.